

# Service Manual

Digital Camera/Body/Lens Kit

Model No. **DMC-G80EB**

**DMC-G80EC**

**DMC-G80EE**

**DMC-G80EF**

**DMC-G80EG**

**DMC-G80MEB**

**DMC-G80MEC**

**DMC-G80MEE**

**DMC-G80MEF**

**DMC-G80MEG**

**DMC-G80HEC**

**DMC-G80HEF**

**DMC-G80HEG**

**DMC-G81EG**

**DMC-G81MEG**

**DMC-G81HEG**

**DMC-G85P**

**DMC-G85PP**

**DMC-G85GC**

**DMC-G85GD**

**DMC-G85GH**

**DMC-G85GK**

**DMC-G85GN**

**DMC-G85MP**

**LUMIX**



**Panasonic**<sup>®</sup>

© Panasonic Corporation 2016 Unauthorized copying and distribution is a violation of law.

**DMC-G85MPP  
DMC-G85MGN  
DMC-G85HGH**

**DMC-G85KGC  
DMC-G85KGN**

Colour  
(K).....Black Type

DMC-G80M/G81M/G85M series: Interchangeable Lens (H-FS12060) is bundled.  
DMC-G80H/G81H/G85H series: Interchangeable Lens (H-FS14140[-KA]) is bundled.  
DMC-G85K series: Interchangeable Lens (H-FS1442A[-KA]) is bundled.

**⚠ WARNING**

This service information is designed for experienced repair technicians only and is not designed for use by the general public. It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product. Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

**TABLE OF CONTENTS**


	PAGE		PAGE
<b>1 Safety Precautions</b> .....	<b>3</b>	8.5. Service Position (Flange Back Adjustment) .....	42
1.1. General Guidelines .....	3	<b>9 Disassembly and Assembly Instructions</b> .....	<b>43</b>
1.2. Leakage Current Cold Check .....	3	9.1. Camera Body Part.....	43
1.3. Leakage Current Hot Check (See Figure. 1).....	3	9.2. Disassembly and Assembly Procedure for the Lens .....	58
1.4. How to Discharge the E.Capacitor on Flash P.C.B. ....	4	<b>10 Measurements and Adjustments</b> .....	<b>59</b>
<b>2 Warning</b> .....	<b>5</b>	10.1. Matrix Chart for Replaced Part and Necessary Adjustment .....	59
2.1. Prevention of Electrostatic Discharge (ESD) to Electrostatically Sensitive (ES) Devices .....	5	<b>11 Maintenance</b> .....	<b>62</b>
2.2. How to Recycle the Lithium Ion Battery (U.S. Only).....	5	11.1. Notice in External Cleaning .....	62
2.3. How to Replace the Lithium Battery.....	6	<b>12 Block Diagram</b> .....	<b>63</b>
2.4. Caution for AC Cord (For EB/GC/GH).....	7	12.1. Overall Block Diagram.....	63
<b>3 Service Navigation</b> .....	<b>8</b>	12.2. System Control Block Diagram .....	64
3.1. Introduction .....	8	12.3. Video/Audio Process (1) Block Diagram.....	65
3.2. About service of bundled lenses .....	8	12.4. Video/Audio Process (2) Block Diagram.....	66
3.3. Important Notice.....	8	12.5. Video/Audio Process (3) Block Diagram.....	67
3.4. Service Notes .....	13	12.6. Gyro Block Diagram.....	68
3.5. General Description About Lead Free Solder (PbF) .....	15	12.7. Flash/Hot Shoe Block Diagram .....	69
3.6. How to Define the Model Suffix (NTSC or PAL Model).....	16	12.8. Lens Block Diagram.....	70
<b>4 Specifications</b> .....	<b>21</b>	12.9. Power(1) Block Diagram.....	71
4.1. Camera Body.....	21	12.10. Power(2) Block Diagram.....	72
4.2. Lens .....	26	12.11. Power(3) Block Diagram.....	73
<b>5 Location of Controls and Components</b> .....	<b>28</b>	<b>13 Wiring Connection Diagram</b> .....	<b>74</b>
5.1. Camera Body.....	28	13.1. Interconnection Diagram.....	74
5.2. Lens .....	30	<b>14 Schematic Diagram</b> .....	<b>75</b>
<b>6 Service Mode</b> .....	<b>31</b>	<b>15 Printed Circuit Board</b> .....	<b>75</b>
6.1. Error Code Memory Function .....	31	<b>16 Exploded View and Replacement Parts List</b> .....	<b>75</b>
<b>7 Troubleshooting Guide</b> .....	<b>33</b>		
7.1. Checking Method of Body and Interchangeable Lens.....	33		
7.2. Wi-Fi Circuit (Jack P.C.B.) .....	37		
<b>8 Service Fixture &amp; Tools</b> .....	<b>38</b>		
8.1. Service Fixture and Tools .....	38		
8.2. Clean Box .....	40		
8.3. When Replacing the Main P.C.B. ....	40		
8.4. Service Position (When checking the each P.C.B.).....	41		

# 1 Safety Precautions

## 1.1. General Guidelines

### 1. IMPORTANT SAFETY NOTICE

There are special components used in this equipment which are important for safety. These parts are marked by

 in the Schematic Diagrams, Circuit Board Layout, Exploded Views and Replacement Parts List. It is essential that these critical parts should be replaced with manufacturer's specified parts to prevent X-RADIATION, shock, fire, or other hazards. Do not modify the original design without permission of manufacturer.

2. An Isolation Transformer should always be used during the servicing of AC Adaptor whose chassis is not isolated from the AC power line. Use a transformer of adequate power rating as this protects the technician from accidents resulting in personal injury from electrical shocks. It will also protect AC Adaptor from being damaged by accidental shorting that may occur during servicing.
3. When servicing, observe the original lead dress. If a short circuit is found, replace all parts which have been overheated or damaged by the short circuit.
4. After servicing, see to it that all the protective devices such as insulation barriers, insulation papers shields are properly installed.
5. After servicing, make the following leakage current checks to prevent the customer from being exposed to shock hazards.

## 1.2. Leakage Current Cold Check

1. Unplug the AC cord and connect a jumper between the two prongs on the plug.
2. Measure the resistance value, with an ohmmeter, between the jumpered AC plug and each exposed metallic cabinet part on the equipment such as screwheads, connectors, control shafts, etc. When the exposed metallic part has a return path to the chassis, the reading should be between  $1\text{ M}\Omega$  and  $5.2\text{ M}\Omega$ . When the exposed metal does not have a return path to the chassis, the reading must be infinity.

## 1.3. Leakage Current Hot Check (See Figure. 1)

1. Plug the AC cord directly into the AC outlet. Do not use an isolation transformer for this check.
2. Connect a  $1.5\text{ k}\Omega$ ,  $10\text{ W}$  resistor, in parallel with a  $0.15\text{ }\mu\text{F}$  capacitor, between each exposed metallic part on the set and a good earth ground, as shown in Figure. 1.
3. Use an AC voltmeter, with  $1\text{ k}\Omega/\text{V}$  or more sensitivity, to measure the potential across the resistor.
4. Check each exposed metallic part, and measure the voltage at each point.
5. Reverse the AC plug in the AC outlet and repeat each of the above measurements.
6. The potential at any point should not exceed  $0.75\text{ V RMS}$ . A leakage current tester (Simpson Model 229 or equivalent) may be used to make the hot checks, leakage current must not exceed  $1/2\text{ mA}$ . In case a measurement is outside of the limits specified, there is a possibility of a shock hazard, and the equipment should be repaired and rechecked before it is returned to the customer.

Hot-Check Circuit

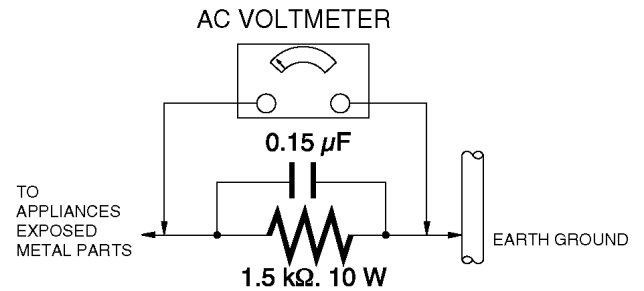


Figure. 1

## 1.4. How to Discharge the E.Capacitor on Flash P.C.B.


- This unit equipped with two pieces of capacitors as E.Capacitor.  
“Either one of the E.Capacitors discharging operation” makes discharging for others as well.

### CAUTION:

- Be sure to discharge the E.Capacitors on Flash P.C.B. before disassembling.
- Be careful of the high voltage circuit on Flash P.C.B. when servicing.

### [Discharging Procedure]

1. Remove the Capacitor Cover.
2. Put the insulation tube on the lead part of resistor (ERG5SJ102: 1k $\Omega$  / 5W).  
(An equivalent type of resistor may be used.)
3. Put the resistor between both terminals of E.Capacitor on the Flash P.C.B. for approx. 5 seconds.
4. After discharging, confirm that the E.Capacitor voltage is lower than 10V by using a voltmeter.

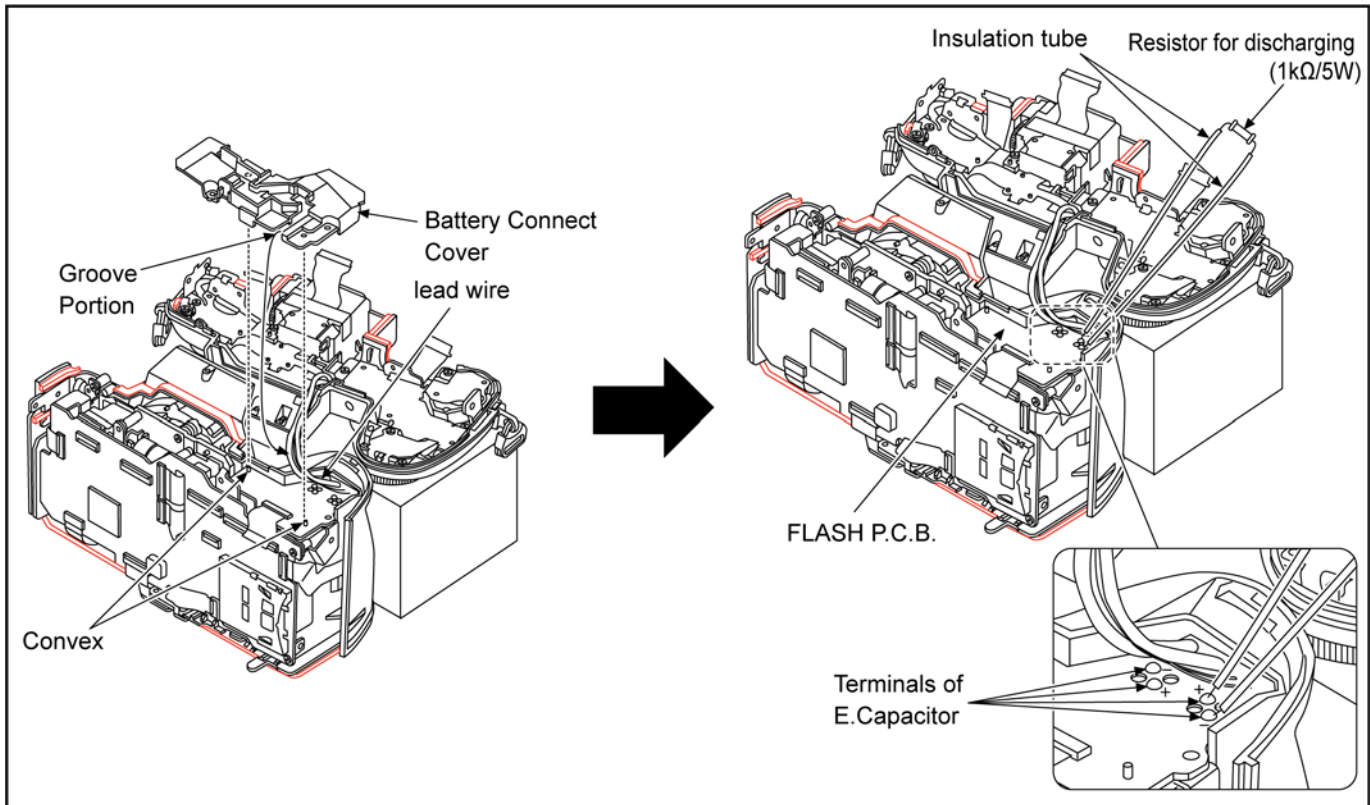

## 2 Warning

### 2.1. Prevention of Electrostatic Discharge (ESD) to Electrostatically Sensitive (ES) Devices

Some semiconductor (solid state) devices can be damaged easily by static electricity. Such components commonly are called Electrostatically Sensitive (ES) Devices.

Examples of typical ES devices are IC (integrated circuits) and some field-effect transistors and semiconductor “chip” components.

The following techniques should be used to help reduce the incidence of component damage caused by electrostatic discharge (ESD).

1. Immediately before handling any semiconductor component or semiconductor-equipped assembly, drain off any ESD on your body by touching a known earth ground. Alternatively, obtain and wear a commercially available discharging ESD wrist strap, which should be removed for potential shock reasons prior to applying power to the unit under test.
2. After removing an electrical assembly equipped with ES devices, place the assembly on a conductive surface such as aluminum foil, to prevent electrostatic charge buildup or exposure of the assembly.
3. Use only a grounded-tip soldering iron to solder or unsolder ES devices.
4. Use only an antistatic solder removal device. Some solder removal devices not classified as “antistatic (ESD protected)” can generate electrical charge sufficient to damage ES devices.
5. Do not use freon-propelled chemicals. These can generate electrical charges sufficient to damage ES devices.
6. Do not remove a replacement ES device from its protective package until immediately before you are ready to install it. (Most replacement ES devices are packaged with leads electrically shorted together by conductive foam, aluminum foil or comparable conductive material).
7. Immediately before removing the protective material from the leads of a replacement ES device, touch the protective material to the chassis or circuit assembly into which the device will be installed.

**CAUTION :**

Be sure no power is applied to the chassis or circuit, and observe all other safety precautions.

8. Minimize bodily motions when handling unpackaged replacement ES devices. (Otherwise harmless motion such as the brushing together of your clothes fabric or the lifting of your foot from a carpeted floor can generate static electricity (ESD) sufficient to damage an ES device).

### 2.2. How to Recycle the Lithium Ion Battery (U.S. Only)

**ENGLISH**



A lithium ion battery that is recyclable powers the product you have purchased. Please call 1-800-8-BATTERY for information on how to recycle this battery.

**FRANÇAIS**



L'appareil que vous vous êtes procuré est alimenté par une batterie au lithium-ion recyclable. Pour des renseignements sur le recyclage de la batterie, veuillez composer le 1-800-8-BATTERY.